

# Floats

Floats provide excellent buoyancy and a lower loss of life over time, compared to floats made with other raw material.




## PVC FLOATS

### TECHNICAL ESPECIFICATIONS

			RX-10	RX-7	R8G	RX-1.5	R6	R-0.15	R3
DIMENSIONS	Internal Diameter	mm	42	29	27	24	26	14.3	10.5
	External Diameter	mm	259	230	211	127	158	62.1	76
	Lenght	mm	275	250	142	147	106	67.6	39.1
WEIGHT	Weight	g	1274	920	384	157	175	17.6	16.3
		lb	2.81	2.03	8.47	0.35	0.39	0.04	0.04
BUOYANCY	Buoyancy	Kg-f	9.60	7.0	3.8	1.6	1.5	0.173	0.145
		Lb-f	21.16	15.43	8.38	3.53	3.31	0.38	0.32
BREAKING STRENGTH	Breaking Strength	Kg-f	1400	1200	600	745	260	--	--
		Lb-f	3086	2645	1323	1642	573	--	--

Note: The Buoyancy is obtained according to method R-ME-8.2/05 (developed by Badinotti Peru S.A.)  
Raw material: PVC

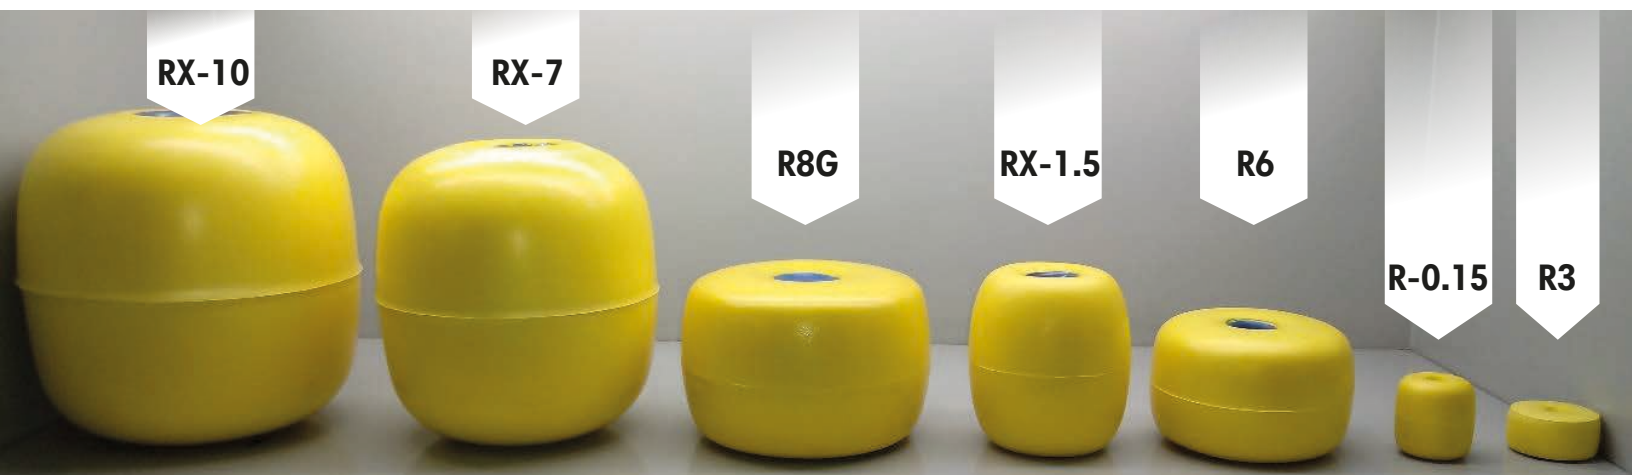

#### BADINOTTI PERU S.A.

Av. Los Precursores 260, Zona Industrial Ventanilla, Callao  
Tel.: ( 51 1 ) 513 5440 / 488 1045 / 488 1050  
peru@badinotti.com

